



Produktmerkmale


- Gehäuse Rotguss, Oberteil Messing
- Innengewinde

Normen und Zulassungen

- DIN 3352

Technische Daten

- Druckstufe PN 16
- max. Betriebstemperatur 200 °C

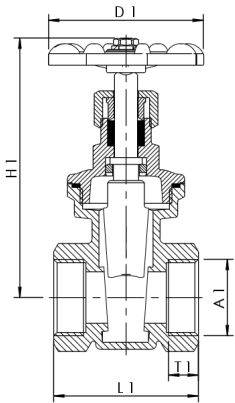

Bestellnr.	DN	A1	D1 (mm)	H1 (mm)	L1 (mm)	T1 (mm)	Zeta	kg
2000001500	15	Rp 1/2	60	85	53	16,3	1,6	0,359
2000002000	20	Rp 3/4	60	103	56	18	1,3	0,531
2000002500	25	Rp 1	70	113	63	19,1	1,3	0,819
2000003200	32	Rp 1 1/4	90	127	71	21,4	1,3	1,156
2000004000	40	Rp 1 1/2	90	153	80	21,4	0,7	1,571
2000005000	50	Rp 2	110	182	90	25,7	0,7	2,538