


Product Features



- wetted parts made of stainless steel
- maintenance-free EPDM spindle seal
- EPDM-seat gasket
- plastic shaft can be shortened
- can be extended with optional extension kit
- female pipe thread
- free from dead spots
- with isolating, balancing and pre-setting function
- sale of stock

Standards and Approvals

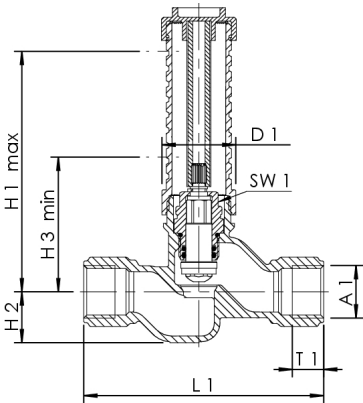

- DVGW approval
- SVGW approval
- plastic parts with KTW and W 270 approval
- according to accepted materials list from German environmental agency
- soundproofing certification according to DIN EN ISO 3822 Class 1
- DIN EN 1213
- ÜA-Reg.-Nr. R-15.2.3-21-17049, WIEN-ZERT

Technical Data

- max. installation depth 110 mm
- pressure rating PN 16
- max. operating temperature 100 °C

part no.	DN	A1	D1 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L1 (mm)	SW1 (mm)	T1 (mm)	Zeta	cv (m³/h)	kg
0561002000	20	Rp 3/4	38,5	140	26,5	70	125	18	16,3	8,9	5,3	0,676
0561002500	25	Rp 1	46	155	31,5	80	140	18	19,1	5,1	11	1,032

accessory

- socket wrench, figure B5105 500 00 005
- handle for flush-mounted valves, figure 590 00
- operating cover for flush-mounted valves, figure 591 00
- fixing set UP-PLUS, figure 597 00
- UP-PLUS extension set, figure 599 00