




Product Features

- wetted parts made of stainless steel
- maintenance-free spindle gasket with self-lubricating EPDM lip gasket
- EPDM-seat gasket
- press connection Geberit MAPRESS
- with sidewise drain valve, rotatable hose connection element G 3/4
- with test port
- check valve with SST spring
- wear-resistant stainless steel valve seat
- with a black handwheel
- free from dead spots
- for any installation position
- Open position indicator

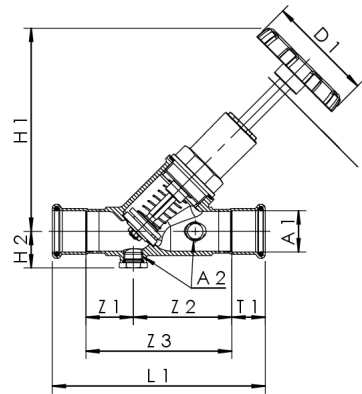

Standards and Approvals

- according to DVGW regulations
- plastic parts with KTW and W 270 approval
- according to accepted materials list from German environmental agency
- up to DN 32 soundproofing certification according to DIN EN ISO 3822 Class 1
- acc. to DIN EN 13959 provisions
- ÜA-Reg.-Nr. R-15.2.3-21-17049, WIEN-ZERT

Technical Data

- pressure rating PN 16
- max. operating temperature 110 °C

part no.	DN	A1 (mm)	A2	D1 (mm)	H1 (mm)	H2 (mm)	L1 (mm)	T1 (mm)	Zeta	Δ p opening (hpa)	cv (m³/h)	kg
0600101500	15	15	G 1/4	60	100	20	112	20	4,9	120	4,03	0,514
0600102000	20	22	G 1/4	60	120	21,5	125	21	3,6	110	8,3	0,694
0600102500	25	28	G 1/4	70	140	25	146	23	2,9	130	14,6	1,008
0600103200	32	35	G 1/4	70	165	26,5	167	26	2,6	80	25,3	1,425
0600104000	40	42	G 1/4	90	190	30	189	30	3,1	80	35,9	2,125
0600105000	50	54	G 1/4	90	230	35,5	222	35	2,3	70	64,7	3,076

accessory

SST sampling valve, figure 087 00
insulation shell for inclined stop valves, figure 471 10