

Product Features


- wetted metal parts made of dezincification-free and corrosion-resistant gunmetal (in closed position), resistant against aggressive water
- can be used in drinking water installations according to DIN 1988 / EN 806 and in a wall hydrant type S according to DIN 14461-1
- discharge rate max. 24 l / min at 2 bar
- maintenance-free EPDM spindle seal
- EPDM-seat gasket
- integrated CV and tube aerator as a security combination HD
- inlet union nut, outlet hose coupling

Standards and Approvals

- according to accepted materials list from German environmental agency
- DIN 14461-1 / DIN 14461-3
- EN ISO 228

Technical Data

- pressure rating PN 16

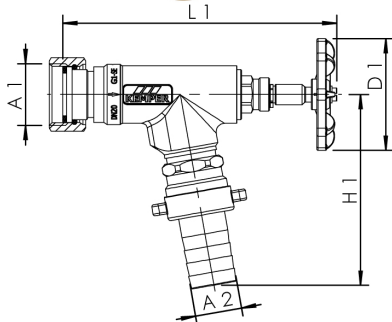

| part no.   | DN | A1  | A2<br>(mm) | D1<br>(mm) | H1<br>(mm) | L1<br>(mm) | kg    |
|------------|----|-----|------------|------------|------------|------------|-------|
| 1190002000 | 20 | G 1 | 25         | 60         | 103        | 148        | 0,784 |