



Product Features


- thermostatic balancing valve for hydraulic balancing of riser and distribution pipes
- for hydraulic balancing of hot water return systems (PWH-C), supports thermal disinfection
- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- isolating unit with temperature sensor pocket
- PTFE seat gasket
- thermostatic balancing unit
- female pipe thread
- with plugged drain port
- free from dead spots
- with isolating, balancing and pre-setting function

Standards and Approvals

- DVGW approval
- ÖVGW approval
- SVGW approval
- WRAS approval
- KIWA approval
- plastic parts with KTW and W 270 approval
- for systems according to DVGW worksheet W 551 / W 553 / DIN 1988-300
- according to accepted materials list from German environmental agency
- ÜA-Reg.-Nr. R-15.2.3-21-17048, WIEN-ZERT

Technical Data

- control range 50 °C - 65 °C
- pressure rating PN 16
- max. operating temperature 90 °C

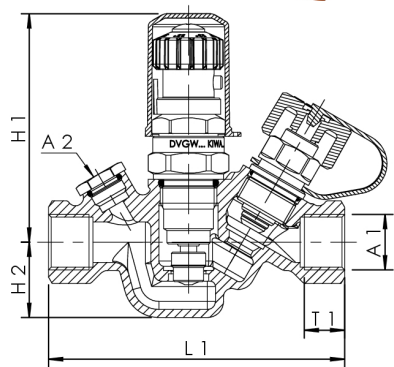

part no.	DN	A1	A2	H1 (mm)	H2 (mm)	L1 (mm)	T1 (mm)	cv (m³/h)	kg
1430001500	15	Rp 1/2	G 1/4	85	28	110	15	1,3	0,687
1430002000	20	Rp 3/4	G 1/4	85	33	123	16,3	1,6	0,941
1430002500	25	Rp 1	G 1/4	97,5	34	136	19,1	3,2	1,185

accessory

- gunmetal sampling valve, figure 187 00
- insulation shell for MULTI-THERM thermostatic balancing valve, figure 471 11
- drain valve made of gunmetal/plastic, figure J7109 173 00
- Pt 1000 temperature sensor, figure T5100 140 00
- dial thermometer, figure T5100 150 00