



Product Features


- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- spindle with O-ring
- EPDM-seat gasket
- gunmetal cone
- press connection for Viega SANPRESS SST pipe and PROFIPRESS copper pipe
- with plugged drain port
- Pt1000 temperature sensor or thermometer can be added using immersion sleeve
- with green handwheel
- free from dead spots

Standards and Approvals

- DVGW approval
- ÖVGW approval
- VA approval
- plastic parts with KTW approval
- according to accepted materials list from German environmental agency
- up to DN 32 soundproofing certification according to DIN EN ISO 3822 Class 1
- DIN EN 1213
- ÜA-Reg.-Nr. R-15.2.3-21-17048, WIEN-ZERT

Technical Data

- pressure rating PN 16
- max. operating temperature 110 °C

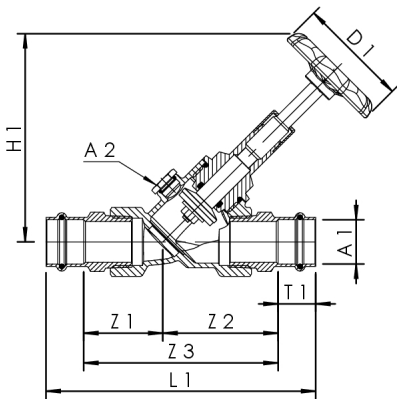

part no.	DN	A1 (mm)	A2	D1 (mm)	H1 (mm)	L1 (mm)	T1 (mm)	Zeta	cv (m³/h)	kg
1713001500	15	15	G 1/4	60	98	129	22	1,3	5,9	0,424
1713001800	15	18	G 1/4	60	98	127	21	1,3	5,9	0,442
1713002000	20	22	G 1/4	60	104	149	24	1,6	12,5	0,626
1713002500	25	28	G 1/4	70	133	172	24	1,4	21,3	1,035
1713003200	32	35	G 1/4	70	162	202	25	1,1	38,7	1,628
1713004000	40	42	G 1/4	70	164	232,5	36	1,5	47,2	2,088
1713005000	50	54	G 1/4	90	212,5	273	41	1,4	84,8	3,548

accessory

- gunmetal sampling valve, figure 187 00
- insulation shell for inclined stop valves, figure 471 10
- drain valve made of gunmetal/plastic, figure J7109 173 00
- axial drain valve made of gunmetal, figure J7109 170 00
- extension element for drain valve DN 8, figure J6109 473 00
- axial drain valve and immersion sleeve, figure J7109 150 00
- Pt 1000 temperature sensor, figure T5100 140 00
- dial thermometer, figure T5100 150 00