



**Product Features**


- gunmetal housing, brass bonnet
- with suitability verification according to DIN 1988
- inlet female thread, outlet hose coupling with cap with chain
- EPDM-seat gasket
- free from dead spots

**Standards and Approvals**

- according to DVGW regulations
- plastic parts with KTW and W 270 approval
- according to accepted materials list from German environmental agency
- according to DIN EN 1213
- ÜA-Reg.-Nr. R-15.2.3-21-17048, WIEN-ZERT

**Technical Data**

- pressure rating PN 16
- max. operating temperature 110 °C

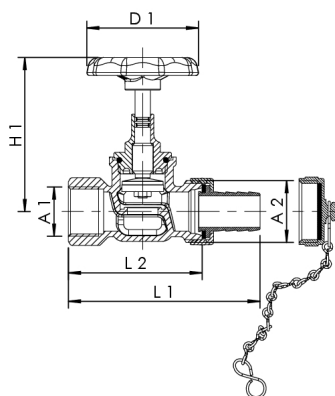

part no.	DN	A1	A2	D1 (mm)	H1 (mm)	L1 (mm)	L2 (mm)	kg
1850101500	15	Rp 1/2	G 3/4	60	67	91	62	0,311
1850102000	20	Rp 3/4	G 1	60	83	104	72	0,506