


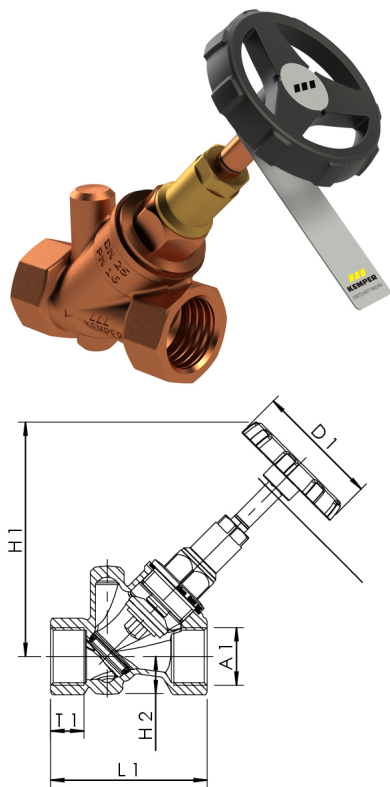

Product Features

- for use before the domestic water meter
- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- 10 year warranty
- maintenance-free spindle sealing with self-lubricating and under pressure replaceable EPDM-lip gasket
- EPDM-seat gasket
- cone rotatable, protected against water hammer
- female pipe thread
- without drain port (drain valve cannot be added)
- spindle thread not in contact with medium
- wear-resistant stainless steel valve seat
- with a black handwheel
- free from dead spots
- Open position indicator

Standards and Approvals

- DVGW approval
- ÖVGW approval
- SVGW approval
- KIWA approval
- VA approval
- plastic parts with KTW and W 270 approval
- according to accepted materials list from German environmental agency
- up to DN 32 soundproofing certification according to DIN EN ISO 3822 Class 1
- DIN EN 1213
- ÜA-Reg.-Nr. R-15.2.3-21-17048, WIEN-ZERT

Technical Data

- pressure rating PN 16
- max. operating temperature 110 °C

part no.	DN	A1	D1 (mm)	H1 (mm)	H2 (mm)	L1 (mm)	T1 (mm)	Zeta	cv (m³/h)	kg
1900001500	15	Rp 1/2	60	90	21	65	15	2,3	5,9	0,419
1900002000	20	Rp 3/4	60	105	24	75	16,3	1,6	12,5	0,519
1900002500	25	Rp 1	70	132	22	90	19,1	1,4	21,3	0,829
1900003200	32	Rp 1 1/4	70	154	27	110	21,4	1,1	38,7	1,21
1900004000	40	Rp 1 1/2	70	162	30	120	21,4	1,8	47,2	1,497
1900005000	50	Rp 2	90	193	35,5	150	25,7	1,4	84,8	2,403

accessory

insulation shell for inclined stop valves, figure 471 10