


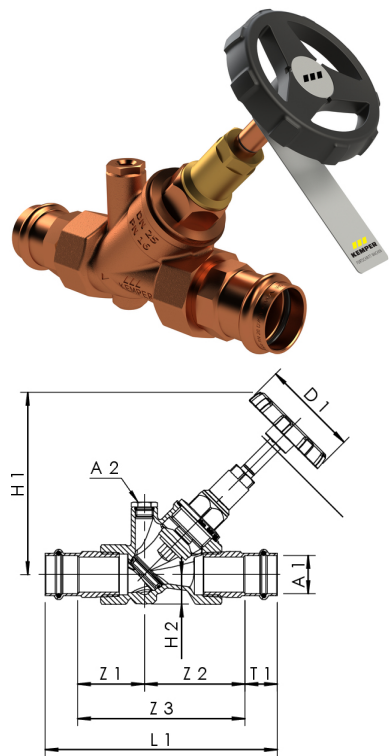

Product Features

- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- 10 year warranty
- maintenance-free spindle sealing with self-lubricating and under pressure replaceable EPDM-lip gasket
- EPDM-seat gasket
- cone rotatable, protected against water hammer
- press connection for Viega SANPRESS SST pipe and PROFIPRESS copper pipe
- with plugged drain port
- Pt1000 temperature sensor or thermometer can be added using immersion sleeve
- spindle thread not in contact with medium
- wear-resistant stainless steel valve seat
- with a black handwheel
- free from dead spots
- Open position indicator

Standards and Approvals

- DVGW approval
- ÖVGW approval
- KIWA approval
- VA approval
- plastic parts with KTW and W 270 approval
- according to accepted materials list from German environmental agency
- up to DN 32 soundproofing certification according to DIN EN ISO 3822 Class 1
- DIN EN 1213
- ÚA-Reg.-Nr. R-15.2.3-21-17048, WIEN-ZERT

Technical Data

- pressure rating PN 16
- max. operating temperature 110 °C

part no.	DN	A1 (mm)	A2	D1 (mm)	H1 (mm)	H2 (mm)	L1 (mm)	T1 (mm)	Zeta	cv (m³/h)	kg
1903001500	15	15	G 1/4	60	101	21	129	22	2,3	5,9	0,529
1903001800	15	18	G 1/4	60	101	21	127	21	2,3	5,9	0,534
1903002000	20	22	G 1/4	60	105	24	146,5	24	1,6	12,5	0,686
1903002500	25	28	G 1/4	70	132	22	172,5	24	1,4	21,3	1,075
1903003200	32	35	G 1/4	70	154	27	200,5	25	1,1	38,7	1,62
1903004000	40	42	G 1/4	70	162	30	228,5	36	1,8	47,2	2,05
1903005000	50	54	G 1/4	90	193	38	275	41	1,4	84,8	3,441

accessory

- gunmetal sampling valve, figure 187 00
- insulation shell for inclined stop valves, figure 471 10
- drain valve made of gunmetal/plastic, figure J7109 173 00
- extension element for drain valve DN 8, figure J6109 473 00
- axial drain valve and immersion sleeve, figure J7109 150 00
- Pt 1000 temperature sensor, figure T5100 140 00
- dial thermometer, figure T5100 150 00