



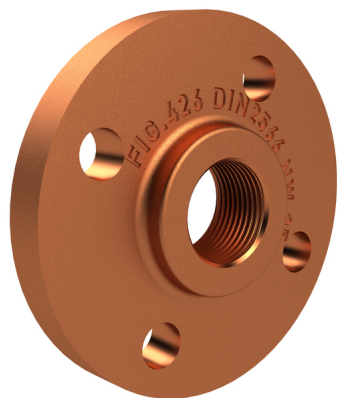

Product Features

- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- according to accepted materials list from German environmental agency
- similar to DIN 2566
- ÜA-Reg.-Nr. R-15.2.3-21-17048, WIEN-ZERT
- pressure rating PN 16
- max. operating temperature 200 °C

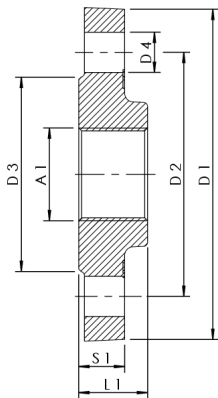

part no.	DN	bolt holes	A1	D1 (mm)	D2 (mm)	D3 (mm)	D4 (mm)	L1 (mm)	S1 (mm)	kg
4260001500	15	4	Rp 1/2	95	65	45	14	20	14	0,68
4260002500	25	4	Rp 1	115	85	68	14	24	16	1,201
4260003200	32	4	Rp 1 1/4	140	100	77	18	26	16	1,595
4260004000	40	4	Rp 1 1/2	150	110	88	18	26	16	1,808
4260005000	50	4	Rp 2	165	125	100	18	28	18	2,485
4260006500	65	4	Rp 2 1/2	185	145	122	18	32,5	18	3,325
4260008000	80	8	Rp 3	200	160	138	18	34	20	4,120
4260010000	100	8	Rp 4	220	180	159	18	38	20	4,755