


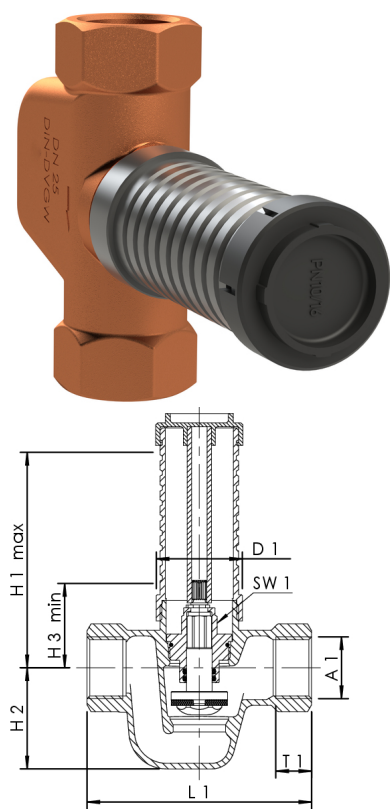

Product Features

- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- maintenance-free EPDM spindle seal
- EPDM-seat gasket
- stainless steel cone
- plastic shaft can be shortened
- can be extended with optional extension kit
- female pipe thread
- free from dead spots
- with isolating, balancing and pre-setting function

Standards and Approvals

- DVGW approval
- plastic parts with KTW and W 270 approval
- according to accepted materials list from German environmental agency
- soundproofing certification according to DIN EN ISO 3822 Class 1
- DIN EN 1213
- ÜA-Reg.-Nr. R-15.2.3-21-17048, WIEN-ZERT

Technical Data

- max. installation depth 110 mm
- pressure rating PN 16
- max. operating temperature 100 °C

part no.	DN	A1	D1 (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L1 (mm)	SW1 (mm)	T1 (mm)	Zeta	cv (m³/h)	kg
5600101500	15	Rp 1/2	38,5	110	37	55	80	17	15	2,7	5,4	0,56
5600102000	20	Rp 3/4	38,5	110	35	55	90	17	16,3	6,9	6	0,62
5600102500	25	Rp 1	46	115	54	55	120	17	19,1	4	12,3	1,137
5600103200	32	Rp 1 1/4	46	115	53	55	124	17	21,4	5,7	16,9	1,33

accessory

- insulation shell for UP-PLUS and ETA-THERM valves, figure 471 14
- socket wrench, figure B5105 500 00 005
- handle for flush-mounted valves, figure 590 00
- operating cover for flush-mounted valves, figure 591 00
- fixing set UP-PLUS, figure 597 00
- UP-PLUS extension set, figure 599 00