




Product Features

- centralized control of actuators and sensors
- with configuration and visualisation software
- CX_9000 CPU
- to control and log actuated valves, temperature- and flow sensors, overflow sensors and hygiene flushing boxes
- operating modes: time, temperature and flow rate
- to control, log and monitor water exchange measures in PWC and PWH installations
- PLC and control modules for KHS sensors and actuators
- can be integrated into a homenetwork or connected to an external PC
- ethernet interface
- can only control actuated 24 volt KHS quarter turn stop valves
- KEMPER recommends ordering the position 'commissioning' as well. The configuration available on request.

Technical Data

- max. ambient temperature 55 °C
- protection class IP55
- power supply 230 V AC

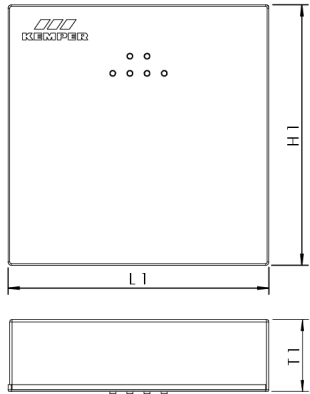

part no.	H1 (mm)	L1 (mm)	T1 (mm)	kg
6860200300	760	760	210	50,9