




## Product Features

- to control, log and monitor water exchange measures in PWC and PWH installations
- as an expansion module for the KHS mini control system MASTER 2.0/2.1
- expandable by 62 units in the CAN-bus in the MASTER/SLAVE system
- to control max. each one KHS quarter turn stop valve, KHS temperature sensor, KHS flow sensor and KHS overflow sensor
- operating modes: time, temperature and flow rate
- settings will be adopted by KHS MASTER 2.0/2.1 via CAN bus cable
- for wall installation
- 16 operating modes programmable for temperature, time, flow rate, routine, and isolating times, data logging available
- can only be combined with actuated KHS quarter turn stop valves (PLUS), 230 Volt
- please commission and maintain according to the operating instructions at the construction site or optionally order these

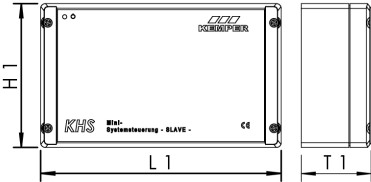

## Technical Data

- min. ambient temperature 0 °C
- max. ambient temperature 50 °C
- protection class IP54
- power supply 230 V AC
- external input 230 V
- switching capacity 230 V, 2 A
- floating alarm relay, max. 230 V, 2 A
- own consumption 3 W

part no.	H1 (mm)	L1 (mm)	T1 (mm)	kg
6860200600	120	200	58	0,611

## accessory

CONTROL-PLUS flow and temperature sensor, Hz signal, union thread, figure 138 4G  
 KHS temperature sensor Pt 1000, figure 628 0G  
 KHS quarter turn stop valve, with 230 V actuator, figure 686 04  
 KHS quarter turn stop valve PLUS, 230 V spring return actuator, figure 686 05  
 KHS quarter turn stop valve PLUS, 230 V spring return actuator, figure 685 15  
 KHS free drain with overflow sensor, figure 688 00  
 KHS Flush Point, 230 V, figure 684 04  
 KHS Flush Point, 230 V, with CONTROL-PLUS, figure 684 05  
 KHS CoolFlow cold water balancing valve, with 230 V actuator, figure 615 0G