




Product Features

- thermostatic balancing valve for hydraulic balancing of riser and distribution pipes
- for hydraulic balancing of hot water return systems (PWH-C), supports thermal disinfection
- wetted metal parts made from dezincification-free and corrosion-resistant gunmetal, resistant against aggressive water
- isolating unit with temperature sensor pocket
- PTFE seat gasket
- thermostatic balancing unit
- female pipe thread
- with plugged drain port
- free from dead spots
- with isolating, balancing and pre-setting function
- no DVGW approval needed because it deviates from DVGW worksheet W 551

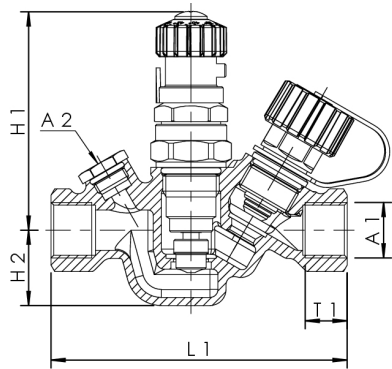

Standards and Approvals

- plastic parts with KTW and W 270 approval
- according to accepted materials list from German environmental agency
- ÜA-Reg.-Nr. R-15.2.3-21-17048, WIEN-ZERT

Technical Data

- control range 30 °C - 50 °C
- pressure rating PN 16
- max. operating temperature 90 °C

part no.	DN	A1	A2	H1 (mm)	H2 (mm)	L1 (mm)	T1 (mm)	cv (m³/h)	kg
1420001500	15	Rp 1/2	G 1/4	85	28	110	15	1,43	0,698
1420002000	20	Rp 3/4	G 1/4	85	33	123	16,3	1,90	0,917
1420002500	25	Rp 1	G 1/4	96	34	136	19,1	2,93	1,237

accessory

- gunmetal sampling valve, figure 187 00
- insulation shell for MULTI-THERM thermostatic balancing valve, figure 471 11
- drain valve made of gunmetal/plastic, figure J7109 173 00
- Pt 1000 temperature sensor, figure T5100 140 00
- dial thermometer, figure T5100 150 00